arXiv:math/0503705v1 [math.DS] 30 Mar 2005

On the adiabatic perturbation theory for systems with impacts

Gorelyshev I.V. Neishtadt A.I.

Space Research Institute, Profsoyuznaya 84/32, Moscow 117997, Russia

E-mail: igor_gor@iki.rssi.ru, aneishta@iki.rssi.ru

Abstract. We justify an applicability of the adiabatic perturbation theory for three well known systems with impacts: a ball between two slowly moving walls, a slowly irregular waveguide, and an adiabatic piston.

The adiabatic perturbation theory (see, for example, [1], p. 200 – 211) is used to describe the dynamics in smooth Hamiltonian systems containing variables of two types: fast and slow. The accuracy estimates of this theory are known. In a number of cases, one can formally apply the procedure of this theory to discontinuous Hamiltonian systems, in particular to systems with impacts. However, the validity of such formal approach does not follow from the theory for smooth systems. A distinctive feature of considered problems is fast (instant) variation of "slow" variables at an impact. In the present work we obtain accuracy estimates of the adiabatic perturbation theory for systems with impacts. We consider three model problems that belong to the three main classes of systems, where the adiabatic perturbation theory is used: 1) the motion of a ball between two slowly moving walls corresponds to the Hamiltonian systems depending on slowly varying parameters; 2) the problem of a slowly irregular waveguide corresponds to the Hamiltonian systems slowly depending on some of variables ; 3) the problem of an adiabatic piston corresponds to the Hamiltonian systems with slow and fast motions. We discuss these problems in order to demonstrate the effectiveness of the approach based on the adiabatic perturbation theory: the dynamics in these problems is well known, and it was described earlier by other methods (in particular, in [2] for problem 3)).

The first approximation of the procedure of the adiabatic perturbation theory leads to a conclusion that the system has an adiabatic invariant (an approximate integral). Such a conclusion is often used for systems with impacts, but its validity is derived from direct

calculations (see [3], Sec. 52). Higher approximations of the procedure of the adiabatic perturbation theory for systems with impacts are formally considered in [4]. The perturbation theory for non-smooth Hamiltonian systems is discussed in works [5, 6], yet only in the case of continuous phase variables. In systems with impacts some of phase variables are discontinuous at a point of reflection.

Dealing with systems with impacts, one usually considers Poincare map in order to obtain results analogous to those obtained for smooth systems by means of higher approximations of the adiabatic perturbation theory. If this map is smooth, one can either use the procedure of the adiabatic perturbation theory for smooth maps (see, for example, [7]), or use an artificial approach, namely, to describe the map as a Poincare map for an auxiliary smooth Hamiltonian system and apply the procedure of the adiabatic perturbation theory to this system [8].

An advantage of the approach described in the present paper is that one can deal with Hamiltonians of original systems, and consider systems with impacts similarly to smooth systems. It is no need to construct and deal with Poincare maps (that can turn out to be non-smooth as, for example, in the problem of an adiabatic piston, sec.4). Under this approach calculations become simpler and more concise.

1 Fermi-Ulam model

The problem of oscillations of a particle between two slowly moving walls is called the Fermi-Ulam problem (or model) (Fig.1)[9]. Let the left wall be fixed (this assumption is made to shorten calculations) and the right wall slowly change its position. The distance between the walls is $d(\varepsilon t) \geq \text{const} > 0$, where t is the time variable, $\varepsilon > 0$ is a small parameter. Introduce slow time variable τ, $\tau = \varepsilon t$. Let function $d(\cdot) \in C^\infty$. We consider the problem on a slow time interval that either does not depend on ε or grows as ε decrease. In the second case we shall suppose that function d and its derivatives are bounded on the real axis. Let the mass of the particle be equal to 1, then the velocity of the particle is equal to its momentum. One can describe the dynamics of the particle in the following way: between the walls the particle has a constant velocity v; the velocity of the particle change sign after an impact with the left wall, and transforms as $v_1 = 2\dot{d} - v$ after an impact with the right moving wall. The Hamiltonian of the particle is well defined between walls and describes free motion of the particle with a constant momentum v.

One can interpret the problem as the motion of a particle in a potential that equals 0 between the walls and $+\infty$ in the other space. The right wall is moving slowly. Therefore, it is useful to consider the problem when the right wall is fixed ($d = \text{const}$). The phase

portrait of this system is shown in Fig.2. On the portrait one can define "action-angle" variables (I, ϕ) in a standard way. "Action" is the area bounded by a phase trajectory divided by 2π: $I = \frac{1}{2\pi} \cdot |v| \cdot 2d = \frac{d}{\pi}\sqrt{2E}$, where E is the Hamiltonian of the particle. Hence, $E = \frac{\pi^2 I^2}{2d^2}$. The angle (phase) ϕ is the uniformly changing angle variable on the trajectory; $\phi = 2\pi\frac{t}{T}$, where t is the time interval corresponding to the motion of the particle from the initial point to a given point and T is the period of motion.

Suppose the phase is zero at the left wall; then

$$\phi = \begin{cases} \pi\frac{x}{d}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{x}{d}), & \phi \in (\pi,\, 2\pi), \end{cases} \tag{1.1}$$

where x is the distance between the particle and the left wall.

If the phase is defined by (1.1), then generating function $W = W(x, I, d)$ of the form

$$W = \begin{cases} \pi\frac{Ix}{d}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{Ix}{d}), & \phi \in (\pi,\, 2\pi) \end{cases} \tag{1.2}$$

transforms variables (v, x) to the "action-angle" variables.

Use generating function W to make a change of variables in the real system with right wall moving slowly. The motion of the particle between the walls is described by the Hamiltonian system with Hamiltonian $H = E + \frac{\partial W}{\partial t}$:

$$H = \frac{\pi^2 I^2}{2d^2} - \frac{I\dot{d}}{d} f(\phi), \tag{1.3}$$

where

$$f(\phi) = \begin{cases} \phi, & \phi \in (0,\, \pi), \\ \phi - 2\pi, & \phi \in (\pi,\, 2\pi). \end{cases} \tag{1.4}$$

Hamiltonian (1.3) completely describes the motion of a particle between the walls.

At an impact with the fixed wall, the value of the "action" variable is preserved. The variation of the "action" variable after an impact with the moving wall is

$$I_+ - I_- = -\frac{2d\dot{d}}{\pi}, \tag{1.5}$$

where I_- and I_+ are the values of I prior to and after the impact correspondingly.

Let us describe an impact by means of Hamiltonian (1.3). An interaction with the wall is instantaneous. Hence, it is likely that the actual value of the variation of the "action" variable after an impact with the moving wall can be calculated in the following way: fix

the moment of time at the impact, consider Hamiltonian (1.3) as a Hamiltonian of a one d.o.f. Hamiltonian system, and obtain the required value of the "action" variable using the energy conservation law.

Lemma 1 *This approach properly describes jump of the "action" variable at an impact with the moving wall.*

Proof.

Suppose the value of time variable is fixed. Set the value of energy prior to an impact equal to the value of energy after an impact:

$$\frac{\pi^2 I_-^2}{2d^2} - \frac{\pi I_- \dot{d}}{d} = \frac{\pi^2 I_+^2}{2d^2} + \frac{\pi I_+ \dot{d}}{d}.$$

Hence, we obtain

$$\frac{\pi(I_+^2 - I_-^2)}{2d} = -\dot{d}(I_+ + I_-),$$

from which immediately follows (1.5).

As applied to the considering problem, the basic statement of the adiabatic perturbation theory can be formulated as follows.

Theorem 1 *After canonical change of variables* $(I, \phi) \mapsto (\hat{I}, \hat{\phi})$ *with generating function*

$$W = \hat{I}\phi + \varepsilon S(\hat{I}, \phi, \tau, \varepsilon), \qquad S = S_1 + \varepsilon S_2 + \ldots + \varepsilon^{r-2} S_{r-1}, \tag{1.6}$$

where r *is any fixed natural number, Hamiltonian (1.3) takes the form*

$$\mathcal{H} = \mathcal{H}_{\Sigma,r}(\hat{I}, \tau, \varepsilon) + \varepsilon^r H_r(\hat{I}, \phi(\hat{I}, \hat{\phi}, \tau, \varepsilon), \tau, \varepsilon), \tag{1.7}$$

$$\mathcal{H}_{\Sigma,r} = E + \varepsilon \mathcal{H}_1 + \ldots + \varepsilon^{r-1} \mathcal{H}_{r-1}.$$

Here $S_i = S_i(\hat{I}, \phi, \tau)$, $\mathcal{H}_i = \mathcal{H}_i(\hat{I}, \tau)$. *Functions* S_i, $\mathcal{H}_i$ *are* C^∞ *in* $\hat{I}, \tau$; *functions* S_i *are continuous with respect to* ϕ.

Proof.

We use the standard procedure of the adiabatic perturbation theory (see, for example, [1]). Make a canonical change of variables with generating function (1.6) in the system with Hamiltonian (1.3). The variables transform according to the following expressions

$$I = \hat{I} + \varepsilon \frac{\partial S}{\partial \phi}, \qquad \hat{\phi} = \phi + \varepsilon \frac{\partial S}{\partial \hat{I}}. \tag{1.8}$$

New Hamiltonian $\mathcal{H}$ has the form

$$\mathcal{H} = H(I, \phi, \tau, \varepsilon) + \varepsilon^2 \frac{\partial S(\hat{I}, \phi, \tau, \varepsilon)}{\partial \tau}. \tag{1.9}$$

Define functions S_i so that the new Hamiltonian has the form (1.7). Substitute expressions (1.8) in (1.9) and equal terms of the same order in ε. Thus, we find the set of equations from which $S_i, \mathcal{H}_i$ can be found. For example, in the first order in ε we get

$$\mathcal{H}_1(\hat{I}, \tau) = \frac{\partial E}{\partial I}\frac{\partial S_1}{\partial \phi} - \frac{Id'}{d} f(\phi).$$

A prime denotes derivative with respect to τ. After averaging over ϕ one obtains $\mathcal{H}_1 = 0$. Therefore, S_1 can be found as a quadrature, which turns out to be continuous with respect to ϕ. One can choose S_1 so that its average is 0. Similarly, one can derive functions S_i that are continuous with respect to ϕ and C^∞ with respect to $\hat{I}, \tau$. The required properties of functions $\mathcal{H}_i, H_r$ follow.

Corollary 1.1 *The value of variable $\hat{I}$ is preserved along a solution with an accuracy $O(\varepsilon^r)$ on time interval $O(\varepsilon^{-k})$ for any prefixed natural number k. The value of variable $\hat{\phi}$ is defined by an integrable Hamiltonian system with Hamiltonian $\mathcal{H}_{\Sigma,r}$ with an accuracy $O(\varepsilon^{r-k})$ on the same time interval.*

Proof.

Consider the change of variables $(I, \phi) \mapsto (\tilde{I}, \tilde{\phi})$ generated by function $\tilde{W} = \tilde{I}\phi + \varepsilon\tilde{S}(\tilde{I}, \phi, \tau, \varepsilon)$, $\tilde{S} = S_1 + \varepsilon S_2 + \ldots + \varepsilon^{r+k-2} S_{r-1}$.

According to Theorem 1, the Hamiltonian function in the new variables has the form:

$$\tilde{\mathcal{H}} = \mathcal{H}_{\Sigma,r+k}(\tilde{I}, \tau, \varepsilon) + \varepsilon^{r+k} H_{r+k}(\tilde{I}, \phi, \tau, \varepsilon). \tag{1.10}$$

The expressions for the change of variables give $\hat{I} - \tilde{I} = O(\varepsilon^r)$. Hence, below we consider variation of variables $\tilde{I}$ and $\hat{\phi}$. Variation of value $\tilde{I}$ between the impacts with the walls is $O(\varepsilon^r)$. Consider variation of value $\tilde{I}$ at an impact with the moving wall. Lemma 1 describes the way to calculate the value of variable I after an impact with the wall. In order to determine variation of variable $\tilde{I}$ one substitutes $I = I(\tilde{I}, \phi, \tau, \varepsilon)$ in Hamiltonian H in (1.3) and notes that $H = \mathcal{H} - \varepsilon^2 \frac{\partial \tilde{S}}{\partial \tau}$. Thus, one obtains the following expression

$$\mathcal{H}_{\Sigma,r+k}(\tilde{I}_+, \tau, \varepsilon) + \varepsilon^{r+k} H_{r+k}(\tilde{I}_+, \pi + 0, \tau, \varepsilon) - \varepsilon^2 \frac{\partial \tilde{S}(\tilde{I}_+, \pi, \tau, \varepsilon)}{\partial \tau} = \mathcal{H}_{\Sigma,r+k}(\tilde{I}_-, \tau, \varepsilon) +$$

$$+\varepsilon^{r+k} H_{r+k}(\tilde{I}_-, \pi - 0, \tau, \varepsilon) - \varepsilon^2 \frac{\partial \tilde{S}(\tilde{I}_-, \pi, \tau, \varepsilon)}{\partial \tau}.$$

Here $\tilde{I}_-$ and $\tilde{I}_+$ are the values of $\tilde{I}$ prior to and after the impact respectively. We note that the function $\tilde{S}$ is continuous with respect to ϕ. Hence, we find

$$\left(\frac{\partial E(\tilde{I}_-, \tau)}{\partial \tilde{I}} + O(\varepsilon^2) \right) (\tilde{I}_+ - \tilde{I}_-) = O(\varepsilon^{r+k}).$$

Therefore $\tilde{I}_+ - \tilde{I}_- = O(\varepsilon^{r+k})$.

The particle collides with the walls not more than $O(\varepsilon^k)$ times. Therefore the value of $\tilde{I}$ varies as $O(\varepsilon^r)$. Hence the part of the statement concerning variable $\tilde{I}$ is proved.

Consider now variation of $\hat{\phi}$. On any time interval between the impacts with the moving wall value of $\hat{\phi}$ deviates from the solution of equation $\dot{\hat{\phi}} = \frac{\partial \mathcal{H}_{\Sigma,r}}{\partial \hat{I}}$, $\hat{I} = \text{const}$ by $O(\varepsilon^r)$. At a collision with the moving wall value of variable $\hat{\phi}$ jumps. Value of the jump can be found from the formulas for change of variables (1.8) and depends on variation of $\hat{I}$. Functions S_m are continuous with respect to ϕ. Hence, the jump in the phase at an impact with the wall is $O(\varepsilon^{r+1})$. This completes the proof of the statement.

Corollary 1.2 *Value of variable I is preserved with an accuracy $O(\varepsilon)$ on a time interval $O(\varepsilon^{-k})$ for any prefixed natural number k.*

Corollary 1.3 *The formulas for change of variables $\hat{I}, \hat{\phi} \mapsto I, \phi$ and approximate expressions $\hat{I} = const$, $\dot{\hat{\phi}} = \frac{\partial \mathcal{H}_{\Sigma,r}}{\partial \hat{I}}$ describe the behaviour of variables I, ϕ with an accuracy $O(\varepsilon^r)$ for I and $O(\varepsilon^{r-k})$ for ϕ on the time interval $O(\varepsilon^{-k})$.*

Remark 1 *Lemma 1, theorem 1 and corollaries 1.1 - 1.3 can be used in case of motion in potential $U(x, \tau) \in C^\infty$ between the walls, and the particle in adiabatic approximation collides with the walls at a nonzero velocity.*

Remark 2 *In [10] systems with impacts are investigated in the following way. Instead of system with impacts, a smooth system with a repulsive potential strong in a thin layer (the thickness of the layer $\delta << 1$, the gradient of the potential $\sim 1/\delta$) is considered. Properties of the system with impacts are derived from that of the smooth system proceeding to limit as $\delta \to 0$. Following this approach one could define such a potential for Fermi-Ulam problem (and for problems considered below, sec. 2,3), use the perturbation theory for the smooth system and obtain corresponding accuracy estimates for the system with impacts. However, one should consider uniformity of accuracy estimates in δ. The method defined above allows to avoid this problem.*

2 A slowly irregular planar waveguide

In this section we consider slowly irregular planar waveguides. The problem is to find the trace for a ray of light propagating in a slowly irregular waveguide with reflective walls. A slow irregularity means that the width of the waveguide is changing slowly along the waveguide's length [11].

Assume, for simplicity, that one wall of the waveguide coincides with x axis. The position of another wall in the plane Oxy is defined by formula $y = d(X)$, where $X = \varepsilon x$, ε is a small parameter (Fig.3). Let $d(\cdot) \in C^\infty$. Let us consider the problem on a time interval $O(\varepsilon^{-k})$, where k is any prefixed natural number. Assume that function d, its derivatives of any order and function $1/d$ are uniformly bounded on the real axis.

One can describe the propagation of rays of light in a medium using the Hamiltonian system with Hamiltonian

$$H = p_x^2 + p_y^2 - n^2(x, y), \tag{2.1}$$

where one should consider only zero energy level $H = 0$ [11]. Here $p_{x,y}$ are the variables canonically conjugated to the coordinates x, y and $n(x, y)$ is the refraction index. In our case inside the waveguide $n = 1$. The Hamiltonian system is not well defined at the reflective walls and one can use only conservation laws there. In the unperturbed system $X = \text{const}$ and the projection of a phase trajectory on p_y, y plane looks similar to the phase trajectory of a particle in Fig.2. Like in the previous section, one can make a canonical change of variables $(p_y,\, y)$ to "action-angle" variables $(I,\, \phi)$: $I = \frac{|p_y| \cdot d(X)}{\pi}$; if phase ϕ is zero at the bottom wall, then

$$\phi = \begin{cases} \pi \frac{y}{d(X)}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{y}{d(X)}), & \phi \in (\pi,\, 2\pi). \end{cases} \tag{2.2}$$

Using standard definition of the phase (2.2) one obtains the generating function for the change of variables $(p_y,\, y)$ to the "action-angle" variables in the following form

$$W(I, y, X) = \begin{cases} \pi \frac{Iy}{d}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{Iy}{d}), & \phi \in (\pi,\, 2\pi). \end{cases} \tag{2.3}$$

Make a canonical change of variables $(\, p_x\,,\ x\,,\ p_y\,,\ y\,) \mapsto (\, \hat{p}_x\,,\ x\,,\ I\,,\ \phi\,)$ with generating function $S = \hat{p}_x x + W(I, y, \varepsilon x)$ in the exact (perturbed) system. The Hamiltonian in the new variables is

$$H = \frac{\pi^2 I^2}{d^2} + \left(\hat{p}_x - \varepsilon \frac{I\, d'}{d} f(\phi) \right)^2 - 1, \tag{2.4}$$

where $f(\phi)$ is defined in (1.4), the prime denotes a derivative with respect to X.

At a reflection at the bottom wall value of the "action" is preserved. At a reflection at the upper wall it transforms according to the following expression

$$I_1 = I - \frac{2\varepsilon d'}{1+\varepsilon^2 d'^2}(\varepsilon d' I + \frac{dp_x}{\pi}). \tag{2.5}$$

Remark 3 *Value $\hat{p}_x$ is preserved at a reflection. Formula (2.5) defines the law of transformation for the angle of the ray of light arriving to the bottom wall. This angle transforms after an impact with the upper wall as $\alpha_1 = \alpha - 2\,arctg(\varepsilon d')$, thus implying (2.5).*

Lemma 2 *Consider Hamiltonian (2.4) and fix variables $(\hat{p}_x,\, x)$. Value of the Hamiltonian is preserved when value of ϕ passes through π. This law of conservation defines the actual value of "action" variable I after reflection at the upper wall of the waveguide.*

Proof.

Set equal values of Hamiltonian (2.4) before and after reflection of the ray at the upper wall:

$$\frac{\pi^2 I^2}{d^2} + \left(\hat{p}_x - \varepsilon\frac{I\,d'}{d}\pi\right)^2 - 1 = \frac{\pi^2 {I_1}^2}{d^2} + \left(\hat{p}_x + \varepsilon\frac{I_1\,d'}{d}\pi\right)^2 - 1.$$

After transformations obtain

$$\frac{\pi^2 I^2}{d^2}(1+\varepsilon^2 d'^2) - 2\varepsilon\hat{p}_x\frac{I\,d'}{d}\pi = \frac{\pi^2 {I_1}^2}{d^2}(1+\varepsilon^2 d'^2) + 2\varepsilon\hat{p}_x\frac{I_1\,d'}{d}\pi.$$

As value of the "action" variable is positive, we find

$$I_1 = I - \frac{2\varepsilon d'}{1+\varepsilon^2 d'^2}\frac{\hat{p}_x d}{\pi}.$$

Substituting the expression for momentum $p_x = \hat{p}_x - \varepsilon\frac{I\,d'}{d}\pi$, we finally get formula

$$I_1 = I - \frac{2\varepsilon d'}{1+\varepsilon^2 d'^2}(\varepsilon d' I + \frac{dp_x}{\pi}),$$

coinciding with (2.5). The lemma is proved.

Let us formulate the basic statement of the adiabatic perturbation theory for the considered problem.

Theorem 2 *After canonical change of variables $(\hat{p}_x, x, I, \phi) \;\mapsto\; (\tilde{p}_x, \tilde{x}, \tilde{I}, \tilde{\phi})$ with generating function*

$$W = \tilde{I}\phi + \tilde{p}_x x + \varepsilon S(\tilde{I}, \phi, \tilde{p}_x, \varepsilon x, \varepsilon), \qquad S = S_1 + \varepsilon S_2 + \ldots + \varepsilon^{r-2} S_{r-2}, \tag{2.6}$$

where r is any prefixed natural number, Hamiltonian (2.4) takes the following form

$$H = \mathcal{H}_{\Sigma,r}(\tilde{I}, \tilde{p}_x, \varepsilon\tilde{x}, \varepsilon) + \varepsilon^r H_r(\tilde{I}, \phi, \tilde{p}_x, \varepsilon x, \varepsilon), \tag{2.7}$$

$$\mathcal{H}_{\Sigma,r} = \frac{\pi^2 \tilde{I}^2}{d^2} + \tilde{p}_x^2 - 1 + \varepsilon\mathcal{H}_1 + \ldots + \varepsilon^{r-1}\mathcal{H}_{r-1}.$$

Here functions S_i, $\mathcal{H}_i$ are C^∞ with respect to $\tilde{I}, \tilde{p}_x, \varepsilon\tilde{x}$; S_i are continuous functions of ϕ.

Proof.

Make a canonical change of variables $(I, \phi, \hat{p}_x, x) \mapsto (\tilde{I}, \tilde{\phi}, \tilde{p}_x, \tilde{x})$ with generating functions (2.6). The variables are transformed as:

$$\begin{cases} I = \tilde{I} + \varepsilon\frac{\partial S}{\partial \phi}, \\ \tilde{\phi} = \phi + \varepsilon\frac{\partial S}{\partial I}, \\ \hat{p}_x = \tilde{p}_x + \varepsilon^2\frac{\partial S}{\partial \varepsilon x}, \\ \varepsilon\tilde{x} = \varepsilon x + \varepsilon^2\frac{\partial S}{\partial \tilde{p}_x}. \end{cases} \tag{2.8}$$

Following the standard procedure of the adiabatic perturbation theory, define functions S_m such that the Hamiltonian in the new variables does not depend on ϕ up to terms of order $O(\varepsilon^m)$ and S_m are continuous and periodic with respect to ϕ. The procedure is as follows: substitute formulas for the change of the "action" and longitudinal variables $(\hat{p}_x, x)$ from (2.8) to Hamiltonian (2.4) and choose the generating function so that the Hamiltonian in the new variables has form (2.7).

Thus, one can recurrently define functions S_m. For example, an equation for S_1 looks as follows:

$$\frac{\partial S_1}{\partial \phi} = \frac{\tilde{p}_x d(X) d'}{\pi^2} f(\phi).$$

One can choose functions S_m in such a way that they have zero average with respect to ϕ. Finally, the Hamiltonian takes the form we need. Functions S_i, H_i obviously have all the properties mentioned in the theorem.

Consider the solutions of Hamiltonian equations with Hamiltonians (2.9) and $\mathcal{H}_{\Sigma,r}(J, p, \varepsilon x, \varepsilon)$ corresponding to initial conditions $\tilde{I}(0) = J(0)$, $\tilde{\phi}(0) = \psi(0)$, $\tilde{p}_x(0) = p(0)$, $\tilde{x}(0) = x(0)$, where ψ is the phase variable conjugated to variable J.

Corollary 2.1 *Value of variable* $\tilde{I}$ *is preserved with an accuracy* $O(\varepsilon^r)$ *on a time interval* ε^{-k} *for any prefixed natural number* k. *The projection of the ray's trajectory on* $\tilde{p}_x, \varepsilon\tilde{x}$ *plane on such an interval lies in the* $O(\varepsilon^r)$*-neighbourhood of curve* $\mathcal{H}_{\Sigma,r}(J, p, \varepsilon x, \varepsilon) = 0$. *Behaviour of variables* $\varepsilon\tilde{x}, \tilde{p}_x, \tilde{\phi}$ *is described by the solution of the system with Hamiltonian* $\mathcal{H}_{\Sigma,r}$ *with accuracies* $O(\varepsilon^{r-k+1}), O(\varepsilon^{r-k+1})$, *and* $O(\varepsilon^{r-k})$ *respectively (under some natural additional conditions given below).*

Proof.

Similarly to the previous section, consider an auxiliary change of variables with generating function

$$W = \bar{I}\phi + \bar{p}_x x + \varepsilon S_1(\bar{I}, \phi, \bar{p}_x, \varepsilon x) + \ldots + \varepsilon^{r+k-1} S_{r+k-1}(\bar{I}, \phi, \bar{p}_x, \varepsilon x).$$

According to Theorem 2, Hamiltonian (2.4) takes the form:

$$H = \mathcal{H}_{\Sigma,r+k}(\bar{I}, \bar{p}_x, \varepsilon\bar{x}, \varepsilon) + \varepsilon^{r+k} H_{r+k}(\bar{I}, \phi, \bar{p}_x, \varepsilon x, \varepsilon),$$

where ϕ and x are considered as functions of new variables $(\bar{I}, \bar{\phi}, \bar{p}_x, \bar{x})$. Formulas for the change of variables give $\tilde{I} - \bar{I} = O(\varepsilon^r)$, $\tilde{\phi} - \bar{\phi} = O(\varepsilon^r)$, $\tilde{x} - \bar{x} = O(\varepsilon^r)$ and $\tilde{p}_x - \bar{p}_x = O(\varepsilon^{r+1})$. Therefore, it is sufficient to consider behaviour of variables $\bar{I}, \tilde{\phi}, \tilde{p}_x, \tilde{x}$.

Consider an approximate conservation of variable $\bar{I}$. The ray's Hamiltonian in the new variables is

$$H = \mathcal{H}_{\Sigma,r+k}(\bar{I}, \bar{p}_x, \varepsilon\bar{x}, \varepsilon) + \varepsilon^{r+k} H_{r+k}(\bar{I}, \phi, \bar{p}_x, \varepsilon x, \varepsilon). \tag{2.9}$$

On each time interval between the reflections of the ray at the upper wall variable $\bar{I}$ vary according to Hamiltonian equation

$$\dot{\bar{I}} = -\varepsilon^{r+k} \frac{\partial H_{r+k}}{\partial \bar{\phi}}.$$

After summing up over all such intervals, it gives an accuracy of conservation $O(\varepsilon^r)$.

It follows from (2.9) that values of variables $(\bar{p}_x, \bar{x})$ jump at a reflection of the ray at the upper wall. However, the generating function for the change of variables is continuous with respect to ϕ. Therefore, formulas for the change of variables give $\Delta\bar{p}_x = O(\varepsilon^2 \Delta\bar{I})$, $\Delta\varepsilon\bar{x} = O(\varepsilon^2 \Delta\bar{I})$, where $\Delta\bar{I}$, $\Delta\bar{p}_x$, $\Delta\varepsilon\bar{x}$ are jumps of variables $\bar{I}$, $\bar{p}_x$, $\varepsilon\bar{x}$ after reflection of the ray at the upper wall. Using Lemma 2, one estimates value of the jump of variable $\bar{I}$ as $O(\varepsilon^{r+k})$. The ray reflects at the upper wall not more than $O(\varepsilon^{-k})$ times on the time interval ε^{-k}. Therefore, total variation of variable $\bar{I}$ is $O(\varepsilon^r)$. Thus, the part of the theorem concerning variable $\bar{I}$ is proved.

Projection of the rays trajectory on $\tilde{p}_x, \varepsilon\tilde{x}$ plane is in $O(\varepsilon^r)$-neighbourhood of the curve $\mathcal{H}_{\Sigma,r}(J, p, \varepsilon x, \varepsilon) = 0$ because along the trajectory $\mathcal{H}_{\Sigma,r}(J, \tilde{p}_x, \varepsilon\tilde{x}, \varepsilon) = O(\varepsilon^r)$.

Values of variables p, x, ψ change continuously, yet values of variables $\bar{p}_x, \bar{x}, \bar{\phi}$ jump at a reflection of the ray at the upper wall. It was noted above that values of jumps of variables $\bar{p}_x, \bar{x}, \bar{\phi}$ are determined by the value of jump of $\bar{I}$ at the reflection of the ray at the upper wall as $\Delta\bar{p} = O(\varepsilon^2\Delta\bar{I}) = O(\varepsilon^{r+k+2})$ $\Delta\bar{x} = O(\varepsilon\Delta\bar{I}) = O(\varepsilon^{r+k+1})$ and $\Delta\bar{\phi} = O(\varepsilon\Delta\bar{I}) = O(\varepsilon^{r+k+1})$. Thus, total variations of values of variables $(\bar{p}_x, \bar{x}, \bar{\phi})$ due to reflections are $O(\varepsilon^{r+2})$ for variable $\bar{p}_x$ and $O(\varepsilon^{r+1})$ for variables $\bar{x}$ и $\bar{\phi}$. Total variations of variables $\tilde{p}_x, \tilde{x}, \tilde{\phi}$ due to reflections are the same.

Consider the zero approximation of Hamiltonian $\mathcal{H}_{\Sigma,r}$:

$$\mathcal{H}^0_{\Sigma,r} \stackrel{def}{=} F = \frac{\pi^2 I^2}{d^2(\varepsilon x)} + p^2$$

The Hamiltonian system with Hamiltonian $\frac{1}{2}\mathcal{H}^0_{\Sigma,r}$ describes the motion of a particle in potential $U = \frac{\pi^2 I^2}{2d^2(\varepsilon x)}$. Assume (see Fig.4) that for the ray under consideration value of function F satisfies one of the following conditions: 1) it is larger than value of any local maximum of $2U$ or 2) the ray can reflect at a potential hump only once or 3) the ray moves between two potential humps (resonator).

Consider case 1). The motion of the ray has a given direction, variables $\tilde{x}$ and x vary monotonically. One can consider variables $\tilde{p}_x$ and p as functions of variables $\varepsilon\tilde{x}$ and εx respectively. At $x = \tilde{x}$ values of variables $\tilde{p}_x$ and p differ by $O(\varepsilon^r)$. It takes different time for variables $\tilde{x}$ and x to reach a given value x_*. This difference can be estimated as follows:

$$\int_{x(0)}^{x_*} \left(\frac{1}{\dot{\tilde{x}}} - \frac{1}{\dot{x}}\right) dx = O(\varepsilon^{r-k}).$$

Hence, for a given moment of time t one obtains: $\varepsilon\tilde{x}(t) - \varepsilon x(t) = O(\varepsilon^{r-k+1})$, $\tilde{p}_x(t) - p(t) = O(\varepsilon^{r-k+1})$.

The deviation of phases $\tilde{\phi} - \psi$ at $x = \tilde{x} = x_*$ is :

$$\tilde{\phi} - \psi = \int_{x(0)}^{x_*} \left(\frac{\omega(\tilde{I}, \tilde{p}_x, \varepsilon x, \varepsilon)}{\dot{\tilde{x}}} - \frac{\omega(J, p, \varepsilon x, \varepsilon)}{\dot{x}}\right) dx + O(\varepsilon^{r-k}) = O(\varepsilon^{r-k}), \qquad (2.10)$$

where we introduced $\omega = \frac{\partial\mathcal{H}_{\Sigma,r}}{\partial I}$. Therefore, for a given moment of time t one gets: $\tilde{\phi}(t) - \psi(t) = O(\varepsilon^{r-k})$.

In case 2) the ray can change its direction of propagation only once. Here one can consider two different regions and use either variable x or p as monotonically changing

variable in the corresponding region. In case 3) the waveguide is configured as a resonator. One can introduce an "angle" variable in the phase portrait of the system with Hamiltonian $\mathcal{H}_{\Sigma,r}(I,p,x)$ as a monotonically changing variable. All arguments here are the same as in case 1).

Corollary 2.2 *Value of variable I is preserved with an accuracy $O(\varepsilon)$ on a time interval ε^{-r} for any prefixed natural number r.*

Corollary 2.3 *Behaviour of variables $I,\phi,\hat{p}_x,x$ can be found from the change of variables $\tilde{I},\tilde{\phi},\tilde{p}_x,\tilde{x} \mapsto I,\phi,\hat{p}_x,x$ together with approximate expressions defining motion in the system with Hamiltonian $\mathcal{H}_{\Sigma,r}(\tilde{I},\tilde{p}_x,\varepsilon\tilde{x})$. An accuracy of such a description is the same as the accuracy for variables $\tilde{I},\tilde{\phi},\tilde{p}_x,\tilde{x}$ according to corollary 2.1.*

Remark 4 *The Hamiltonian system with Hamiltonian*

$$H = \frac{\pi^2 I^2}{d^2} + \hat{p}_x^2 - 1 \tag{2.11}$$

considered on the energy level $H=0$ describes the ray's trajectory with an accuracy $O(\varepsilon)$ on time intervals of order ε^{-1}.

Remark 5 *Suppose that there is nonhomogeneous medium between the walls such that a refraction index $n(\varepsilon x,y) \in C^\infty$ and trace of the ray in adiabatic approximation is inclined to the walls at reflection at a nonzero angle; then Lemma 2, Theorem 2 and its corollaries 2.1 – 2.3 are still valid.*

3 Dynamics of a massive piston in a gas of light particles

The problem of an adiabatic piston is an important model in statistical mechanics. It is considered in the context of attempts to derive thermodynamics laws from the laws of mechanics (see, for example, [2],[12]). The corresponding system consists of a container with a massive cylindrical piston and a gas of identical light particles that move independently elastically colliding with the walls of the container and with the piston.

Let the mass of a particle be equal to 1. Length of the container subtracting thickness of the piston L and the number of gas particles are of the order 1. Mass of the piston M is large in comparison with mass of the gas. Suppose the piston is at rest at the initial moment of time; then energy of the system does not depend on mass of the piston. Hence, one can estimate energy of the piston as $O(1)$ and its typical velocity as $O(\frac{1}{\sqrt{M}})$. Therefore, it is useful to introduce a small parameter $\varepsilon = \frac{1}{\sqrt{M}}$. Let us discuss the problem on a time interval of order ε^{-1}.

Below, to shorten the calculations, we consider the case when there is only one particle on each side of the piston (Fig.5). One can easily generalize following arguments for the case of any prefixed number of particles. At the end of the section we give the result for the general case. Without loss of generality, assume that the particles' velocities are parallel to the axis of the container; thus, the motion is one-dimentional. Let indexes l, r correspond to variables of left and right particles respectively. The variables without indexes correspond to the piston. Thus, full energy of the system is of the form:

$$E = \varepsilon^2 \frac{P^2}{2} + \frac{p_l^2}{2} + \frac{p_r^2}{2}, \tag{3.1}$$

where $p_{l,r}$ are momenta of particles, P is momentum of the piston. Denote as $x_{l,r}$ distances between particles and the left wall of the container, as X distance between the piston and the left wall of the container. The distance for the right particle is calculated subtracting the thickness of the piston.

Suppose the piston is fixed. For each particle make a canonical change of variables from (p, x) to "action-angle" variables (I, ϕ) the same way as in Fermi-Ulam problem (Sec. 1). Let phases $\phi_{l,r}$ be zero at the walls of the container; then

$$\phi_l = \begin{cases} \pi\frac{x_l}{X}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{x_l}{X}), & \phi \in (\pi,\, 2\pi), \end{cases} \qquad \phi_r = \begin{cases} \pi\frac{L-x_r}{L-X}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{L-x_r}{L-X}), & \phi \in (\pi,\, 2\pi). \end{cases} \tag{3.2}$$

Conjugated "action" variables are $I_l = \frac{|p_l|X}{\pi}$, $I_r = \frac{|p_r|(L-X)}{\pi}$. If phases are defined by (3.2), generating functions for the change of variables (p, x) to "action-angle" have the following forms:

$$S_l(I_l, x_l, X) = \begin{cases} \pi\frac{I_l x_l}{X}, & \phi_l \in (0,\, \pi), \\ \pi I_l(2 - \frac{x_l}{X}), & \phi_l \in (\pi,\, 2\pi), \end{cases}$$

$$S_r(I_r, x_r, X) = \begin{cases} \pi\frac{I_r(L-x_r)}{L-X}, & \phi_r \in (0,\, \pi), \\ \pi I_r(2 - \frac{L-x_r}{L-X}), & \phi_r \in (\pi,\, 2\pi). \end{cases}$$

Make the change of variables with generating function $W = \hat{P}X + S_l(I_l, x_l, X) + S_r(I_r, x_r, X)$ in the exact system, when the piston is moving. The Hamiltonian in the new variables has the form:

$$\mathcal{H} = \varepsilon^2 \frac{1}{2}\left(\hat{P} - \frac{I_l}{X} f(\phi_l) + \frac{I_r}{L-X} f(\phi_r)\right)^2 + \frac{\pi^2 I_l^2}{2X^2} + \frac{\pi^2 I_r^2}{2(L-X)^2}, \tag{3.3}$$

where function $f(\phi)$ defined by (1.4).

Let us find jump of the "action" variable at an impact. It is natural to fix values of all variables except the variables of the colliding particle, obtain the Hamiltonian for the particle and consider the conservation law for the value of the Hamiltonian. Let us formulate the corresponding lemma for the left particle (the lemma for the right particle is formulated analogously). Let the prime denote value of the variable after an impact.

Lemma 3 *This approach defines actual value of the "action" variable after an impact:*

$$I_l' = I_l - \frac{2PX}{\pi M} + \frac{2}{M+1}(\frac{PX}{\pi M} - I_l). \tag{3.4}$$

Remark 6 *Velocities v and V of the particles of mass 1 and M transform after an elastic collision as follows:*

$$\begin{cases} V' = V + \frac{2}{M+1}(v - V), \\ v' = 2V - v + \frac{2}{M+1}(v - V). \end{cases}$$

"Action" of the particle and momentum of the piston are $I_l = \frac{|v|X}{\pi}$, $P = MV$, from which follows (3.4).

Remark 7 *If two particles collide with the piston at the same moment, the further dynamics is not defined. Measure of initial conditions corresponding to such collisions equals 0. Therefore, we do not consider these initial condition.*

Proof.

An impact is the the passage of ϕ_l through the value π. Equating values of the energy prior to- and after an impact, we find

$$\frac{\pi^2 I_l^2}{2X^2}\frac{M+1}{M} - \frac{\pi I_l}{MX}(\hat{P} + \frac{I_r f(\phi_r)}{L-X}) = \frac{\pi^2 I_l'^2}{2X^2}\frac{M+1}{M} + \frac{\pi I_l'}{MX}(\hat{P} + \frac{I_r f(\phi_r)}{L-X}). \tag{3.5}$$

After calculations one obtains value of the "action" variable:

$$I_l' = I_l - \frac{2}{M+1}\frac{X}{\pi}(\hat{P} + \frac{I_r f(\phi_r)}{L-X}). \tag{3.6}$$

Let P denote value of momentum of the piston prior to an impact; then

$$I_l' = I_l - \frac{2}{M+1}\frac{X}{\pi}(P + \frac{\pi I_l}{X}). \tag{3.7}$$

Finally

$$I_l' = I_l - \frac{2PX}{\pi M} + \frac{2}{M+1}(\frac{PX}{\pi M} - I_l),$$

and the lemma is proved.

Theorem 3 *Values of variables* $I_{l,r}$ *are preserved with an accuracy* $O(\varepsilon)$ *on a time interval* ε^{-1}.

Proof.

Introduce the normalized momentum of the piston by expression $\check{P} = \varepsilon\hat{P}$ and consider Hamiltonian (3.3) with an accuracy $O(\varepsilon^2)$:

$$\mathcal{H} = \frac{\check{P}^2}{2} + \frac{\pi^2 I_l^2}{2X^2} + \frac{\pi^2 I_r^2}{2(L-X)^2} - \varepsilon\check{P}\frac{I_l}{X}f(\phi_l) + \varepsilon\check{P}\frac{I_r}{L-X}f(\phi_r) + O(\varepsilon^2). \tag{3.8}$$

Make a canonical change of variables $(\, I_{l,r}\,,\ \phi_{l,r}\,,\ \varepsilon^{-1}\check{P}\,,\ X\,) \mapsto (\, \tilde{I}_{l,r}\,,\ \tilde{\phi}_{l,r}\,,\ \varepsilon^{-1}\tilde{P}\,,\ \tilde{X}\,)$, eliminating dependence of the Hamiltonian on the phase with an accuracy ε^2. The generating function for this change of variables has the form:

$$W = \frac{1}{\varepsilon}\tilde{P}X + \tilde{I}_l\phi_l + \tilde{I}_r\phi_r + \varepsilon S_l(\tilde{I}_l, \phi_l, \tilde{P}, X) + \varepsilon S_r(\tilde{I}_r, \phi_r, \tilde{P}, X). \tag{3.9}$$

Consider the expressions connecting old and new variables:

$$\begin{cases} I_{l,r} = \tilde{I}_{l,r} + \varepsilon\frac{\partial S_{l,r}}{\partial \phi_{l,r}}, \\ \tilde{\phi}_{l,r} = \phi_{l,r} + \varepsilon\frac{\partial S_{l,r}}{\partial I_{l,r}}, \\ P = \tilde{P} + \varepsilon^2\frac{\partial S_l}{\partial X} + \varepsilon^2\frac{\partial S_r}{\partial X}, \\ \tilde{X} = X + \varepsilon^2\frac{\partial S_l}{\partial \tilde{P}} + \varepsilon^2\frac{\partial S_r}{\partial \tilde{P}}. \end{cases} \tag{3.10}$$

Substitute these expressions in Hamiltonian (3.8) and choose functions $S_{l,r}$ so that the Hamiltonian in the new variables does not depend on the phases in the first order in ε.

Therefore, functions $S_{l,r}$ satisfy equations

$$\frac{\partial S_l}{\partial \phi_l} = \frac{\tilde{P}Xf(\phi_l)}{\pi^2}, \qquad \frac{\partial S_r}{\partial \phi_r} = -\frac{\tilde{P}(L-X)f(\phi_r)}{\pi^2}. \tag{3.11}$$

It follows from (3.11) that functions $S_{l,r}$ are defined up to an arbitrary function of variables $\tilde{I}_{l,r}, \tilde{P}, X$. Let this function be equal to 0 and call variables $\tilde{I}_{l,r}$ the "improved

actions". It is easy to see from (3.10), (3.11), that the new phase coincides with the old one ($\tilde{\phi}_{l,r} = \phi_{l,r}$), and the Hamiltonian has a discontinuity at $\tilde{\phi}_{l,r} = \pi$.

Lemma 3 and formulas (3.10), (3.11) allow to find variation of the "improved action" after an impact as $O(\varepsilon^2)$. Variation of the "improved actions" between collisions is also $O(\varepsilon^2)$. One can estimate the number of collisions on a time interval ε^{-1} as $O(\varepsilon^{-1})$. Hence, on a time interval ε^{-1} "improved actions" vary by $O(\varepsilon)$. The "action" variables are related to "improved actions" by formulas for the change of variables $I_{l,r} = \tilde{I}_{l,r} + \varepsilon \frac{\partial S_{l,r}}{\partial \phi_{l,r}}$. Therefore, "action" variables vary by $O(\varepsilon)$ on the same time interval and the theorem is proved.

Corollary 3.1 *Let*

$$H = \varepsilon^2 \frac{P^2}{2} + \frac{\pi^2 I_l^2}{2X^2} + \frac{\pi^2 I_r^2}{2(L-X)^2}, \qquad I_{l,r} = const, \tag{3.12}$$

where $I_{l,r}$ are initial values of the "action" variables. The Hamiltonian system with Hamiltonian (3.12) describe the behaviour of variables $\varepsilon P, X$ with an accuracy $O(\varepsilon)$ on a time interval ε^{-1} .

One can similarly consider the system with any prefixed number of particles. Value of the "action" variable of each particle is preserved with an accuracy $O(\varepsilon)$ on a time interval ε^{-1} . The Hamiltonian system with Hamiltonian

$$H = \varepsilon^2 \frac{P^2}{2M} + \frac{\pi^2}{2X^2} I_{\Sigma,l}^2 + \frac{\pi^2}{2(L-X)^2} I_{\Sigma,r}^2, \tag{3.13}$$

describes behaviour of variables $\varepsilon P, X$ with an accuracy $O(\varepsilon)$ on the same time interval. Here $I_{\Sigma,r}^2$ and $I_{\Sigma,l}^2$ are the sums of squared initial values of "action" variables for the left particles and for the right particles respectively. (This result was first derived in [2] by a different method.)

Remark 8 *In the considered approximation the piston oscillates in potential $U = \frac{\pi^2}{2\tilde{X}^2} I_{\Sigma,l}^2 + \frac{\pi^2}{2(L-\tilde{X})^2} I_{\Sigma,r}^2$ (Fig.6).*

4 Acknowledgements

The work was partially supported by RFBR (03-01-00158, НШ136.2003.1)

References

[1] V.I. Arnold, V.V. Kozlov, A.I. Neishtadt, Mathematical aspects of classical and celestial mechanics, Encyclopaedia of Mathematical Sciences, Vol. 3, Springer, Berlin, (1988).

[2] Ya.G. Sinai, Dynamics of a massive piston surrounded by a finite number of light particles, Theor. Math. Phys., 125, 1351-1357 (1999).

[3] V.I. Arnold. Mathematical Methods of Classical Mechanics, Springer, New York, (1978).

[4] A.I. Neishtadt, Propagation of beams through smoothly irregular waveguides and theory of perturbations in Hamiltonian systems. Radiophys. and Quantum Electronics, 25, no. 2, 157–164 (1982)

[5] A.P. Markeev, On the motion of a solid with an ideal nonretaining constraint, J. Appl. Math. Mech., 49 (1985), no. 5, 545–552 (1986)

[6] A.P. Markeev, Qualitative analysis of systems with an ideal nonretaining constraint, J. Appl. Math. Mech., 53 (1989), no. 6, 685–689 (1991)

[7] V. Zharnitsky, Invariant tori in Hamiltonian systems with impacts, Commun. Math. Phys., 211, no. 2, 289 – 302 (2000).

[8] A.I. Neishtadt, The separation of motions in systems with rapidly rotating phase, J. Appl. Math. Mech., 48, 133-139 (1984).

[9] R.Z. Sagdeev, D.A. Usikov, G.M. Zaslavsky. Nonlinear Physics, Harwood Academic Publishers, Chur, (1988).

[10] V.V. Kozlov, D.V. Treshchev, A Genetic Introduction to the Dynamics of Systems with Impacts, AMS. 171 pp. (1991).

[11] Yu.A. Kravtsov, Yu.A. Orlov, Geometrical Optics of Inhomogeneous Media, Springer Verlag, New York, (1990).

[12] E. Lieb, Some problems in statistical mechanics that I would like to see solved, Phys. A, 263, no. 1–4, 491 – 499 (1999).

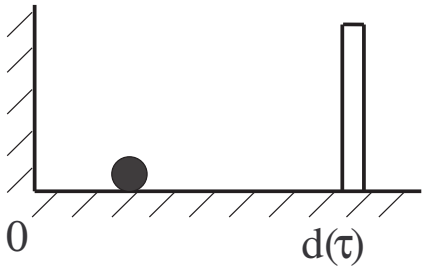

Figure 1: A ball between slowly moving walls.

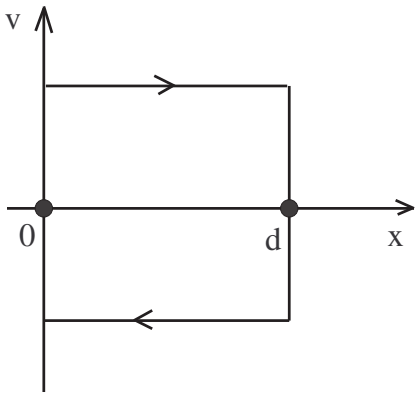

Figure 2: A phase portrait for the motion of the particle.

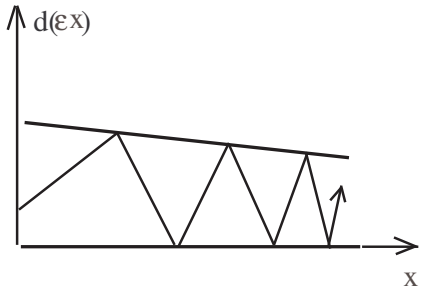

Figure 3: A planar slowly irregular waveguide.

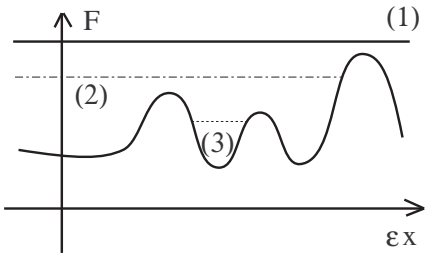

Figure 4: The plot of function $2U$ and levels of function F.

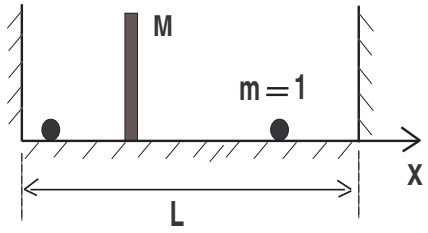

Figure 5: The system of a piston and two particles.

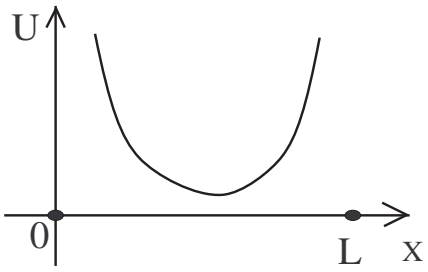

Figure 6: The effective potential energy of the piston.

arXiv:math/0503705v1 [math.DS] 30 Mar 2005

On the adiabatic perturbation theory for systems with impacts

Gorelyshev I.V. Neishtadt A.I.

Space Research Institute, Profsoyuznaya 84/32, Moscow 117997, Russia

E-mail: igor_ gor@iki.rssi.ru, aneishta@iki.rssi.ru

Abstract. We justify an applicability of the adiabatic perturbation theory for three well known systems with impacts: a ball between two slowly moving walls, a slowly irregular waveguide, and an adiabatic piston.

The adiabatic perturbation theory (see, for example, [1], p. 200 – 211) is used to describe the dynamics in smooth Hamiltonian systems containing variables of two types: fast and slow. The accuracy estimates of this theory are known. In a number of cases, one can formally apply the procedure of this theory to discontinuous Hamiltonian systems, in particular to systems with impacts. However, the validity of such formal approach does not follow from the theory for smooth systems. A distinctive feature of considered problems is fast (instant) variation of "slow" variables at an impact. In the present work we obtain accuracy estimates of the adiabatic perturbation theory for systems with impacts. We consider three model problems that belong to the three main classes of systems, where the adiabatic perturbation theory is used: 1) the motion of a ball between two slowly moving walls corresponds to the Hamiltonian systems depending on slowly varying parameters; 2) the problem of a slowly irregular waveguide corresponds to the Hamiltonian systems slowly depending on some of variables ; 3) the problem of an adiabatic piston corresponds to the Hamiltonian systems with slow and fast motions. We discuss these problems in order to demonstrate the effectiveness of the approach based on the adiabatic perturbation theory: the dynamics in these problems is well known, and it was described earlier by other methods (in particular, in [2] for problem 3)).

The first approximation of the procedure of the adiabatic perturbation theory leads to a conclusion that the system has an adiabatic invariant (an approximate integral). Such a conclusion is often used for systems with impacts, but its validity is derived from direct

calculations (see [3], Sec. 52). Higher approximations of the procedure of the adiabatic perturbation theory for systems with impacts are formally considered in [4]. The perturbation theory for non-smooth Hamiltonian systems is discussed in works [5, 6], yet only in the case of continuous phase variables. In systems with impacts some of phase variables are discontinuous at a point of reflection.

Dealing with systems with impacts, one usually considers Poincare map in order to obtain results analogous to those obtained for smooth systems by means of higher approximations of the adiabatic perturbation theory. If this map is smooth, one can either use the procedure of the adiabatic perturbation theory for smooth maps (see, for example, [7]), or use an artificial approach, namely, to describe the map as a Poincare map for an auxiliary smooth Hamiltonian system and apply the procedure of the adiabatic perturbation theory to this system [8].

An advantage of the approach described in the present paper is that one can deal with Hamiltonians of original systems, and consider systems with impacts similarly to smooth systems. It is no need to construct and deal with Poincare maps (that can turn out to be non-smooth as, for example, in the problem of an adiabatic piston, sec.4). Under this approach calculations become simpler and more concise.

1 Fermi-Ulam model

The problem of oscillations of a particle between two slowly moving walls is called the Fermi-Ulam problem (or model) (Fig.1)[9]. Let the left wall be fixed (this assumption is made to shorten calculations) and the right wall slowly change its position. The distance between the walls is $d(\varepsilon t) \geq \text{const} > 0$, where t is the time variable, $\varepsilon > 0$ is a small parameter. Introduce slow time variable τ, $\tau = \varepsilon t$. Let function $d(\cdot) \in C^\infty$. We consider the problem on a slow time interval that either does not depend on ε or grows as ε decrease. In the second case we shall suppose that function d and its derivatives are bounded on the real axis. Let the mass of the particle be equal to 1, then the velocity of the particle is equal to its momentum. One can describe the dynamics of the particle in the following way: between the walls the particle has a constant velocity v; the velocity of the particle change sign after an impact with the left wall, and transforms as $v_1 = 2\dot{d} - v$ after an impact with the right moving wall. The Hamiltonian of the particle is well defined between walls and describes free motion of the particle with a constant momentum v.

One can interpret the problem as the motion of a particle in a potential that equals 0 between the walls and $+\infty$ in the other space. The right wall is moving slowly. Therefore, it is useful to consider the problem when the right wall is fixed ($d = \text{const}$). The phase

portrait of this system is shown in Fig.2. On the portrait one can define "action-angle" variables (I, ϕ) in a standard way. "Action" is the area bounded by a phase trajectory divided by 2π : $I = \frac{1}{2\pi} \cdot |v| \cdot 2d = \frac{d}{\pi}\sqrt{2E}$, where E is the Hamiltonian of the particle. Hence, $E = \frac{\pi^2 I^2}{2d^2}$. The angle (phase) ϕ is the uniformly changing angle variable on the trajectory; $\phi = 2\pi\frac{t}{T}$, where t is the time interval corresponding to the motion of the particle from the initial point to a given point and T is the period of motion.

Suppose the phase is zero at the left wall; then

$$\phi = \begin{cases} \pi\frac{x}{d}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{x}{d}), & \phi \in (\pi,\, 2\pi), \end{cases} \tag{1.1}$$

where x is the distance between the particle and the left wall.

If the phase is defined by (1.1), then generating function $W = W(x, I, d)$ of the form

$$W = \begin{cases} \pi\frac{Ix}{d}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{Ix}{d}), & \phi \in (\pi,\, 2\pi) \end{cases} \tag{1.2}$$

transforms variables (v, x) to the "action-angle" variables.

Use generating function W to make a change of variables in the real system with right wall moving slowly. The motion of the particle between the walls is described by the Hamiltonian system with Hamiltonian $H = E + \frac{\partial W}{\partial t}$:

$$H = \frac{\pi^2 I^2}{2d^2} - \frac{I\dot{d}}{d} f(\phi), \tag{1.3}$$

where

$$f(\phi) = \begin{cases} \phi, & \phi \in (0,\, \pi), \\ \phi - 2\pi, & \phi \in (\pi,\, 2\pi). \end{cases} \tag{1.4}$$

Hamiltonian (1.3) completely describes the motion of a particle between the walls.

At an impact with the fixed wall, the value of the "action" variable is preserved. The variation of the "action" variable after an impact with the moving wall is

$$I_+ - I_- = -\frac{2d\dot{d}}{\pi}, \tag{1.5}$$

where I_- and I_+ are the values of I prior to and after the impact correspondingly.

Let us describe an impact by means of Hamiltonian (1.3). An interaction with the wall is instantaneous. Hence, it is likely that the actual value of the variation of the "action" variable after an impact with the moving wall can be calculated in the following way: fix the

moment of time at the impact, consider Hamiltonian (1.3) as a Hamiltonian of a one d.o.f. Hamiltonian system, and obtain the required value of the "action" variable using the energy conservation law.

Lemma 1 *This approach properly describes jump of the "action" variable at an impact with the moving wall.*

Proof.

Suppose the value of time variable is fixed. Set the value of energy prior to an impact equal to the value of energy after an impact:

$$\frac{\pi^2 I_-^2}{2d^2} - \frac{\pi I_- \dot{d}}{d} = \frac{\pi^2 I_+^2}{2d^2} + \frac{\pi I_+ \dot{d}}{d}.$$

Hence, we obtain

$$\frac{\pi(I_+^2 - I_-^2)}{2d} = -\dot{d}(I_+ + I_-),$$

from which immediately follows (1.5).

As applied to the considering problem, the basic statement of the adiabatic perturbation theory can be formulated as follows.

Theorem 1 *After canonical change of variables* $(I, \phi) \mapsto (\hat{I}, \hat{\phi})$ *with generating function*

$$W = \hat{I}\phi + \varepsilon S(\hat{I}, \phi, \tau, \varepsilon), \qquad S = S_1 + \varepsilon S_2 + \ldots + \varepsilon^{r-2} S_{r-1}, \tag{1.6}$$

where r *is any fixed natural number, Hamiltonian (1.3) takes the form*

$$\mathcal{H} = \mathcal{H}_{\Sigma,r}(\hat{I}, \tau, \varepsilon) + \varepsilon^r H_r(\hat{I}, \phi(\hat{I}, \hat{\phi}, \tau, \varepsilon), \tau, \varepsilon), \tag{1.7}$$

$$\mathcal{H}_{\Sigma,r} = E + \varepsilon \mathcal{H}_1 + \ldots + \varepsilon^{r-1} \mathcal{H}_{r-1}.$$

Here $S_i = S_i(\hat{I}, \phi, \tau)$, $\mathcal{H}_i = \mathcal{H}_i(\hat{I}, \tau)$. *Functions* S_i, $\mathcal{H}_i$ *are* C^∞ *in* $\hat{I}, \tau$; *functions* S_i *are continuous with respect to* ϕ.

Proof.

We use the standard procedure of the adiabatic perturbation theory (see, for example, [1]). Make a canonical change of variables with generating function (1.6) in the system with Hamiltonian (1.3). The variables transform according to the following expressions

$$I = \hat{I} + \varepsilon \frac{\partial S}{\partial \phi}, \qquad \hat{\phi} = \phi + \varepsilon \frac{\partial S}{\partial \hat{I}}. \tag{1.8}$$

New Hamiltonian $\mathcal{H}$ has the form

$$\mathcal{H} = H(I, \phi, \tau, \varepsilon) + \varepsilon^2 \frac{\partial S(\hat{I}, \phi, \tau, \varepsilon)}{\partial \tau}. \tag{1.9}$$

Define functions S_i so that the new Hamiltonian has the form (1.7). Substitute expressions (1.8) in (1.9) and equal terms of the same order in ε. Thus, we find the set of equations from which $S_i, \mathcal{H}_i$ can be found. For example, in the first order in ε we get

$$\mathcal{H}_1(\hat{I}, \tau) = \frac{\partial E}{\partial I}\frac{\partial S_1}{\partial \phi} - \frac{Id'}{d} f(\phi).$$

A prime denotes derivative with respect to τ. After averaging over ϕ one obtains $\mathcal{H}_1 = 0$. Therefore, S_1 can be found as a quadrature, which turns out to be continuous with respect to ϕ. One can choose S_1 so that its average is 0. Similarly, one can derive functions S_i that are continuous with respect to ϕ and C^∞ with respect to $\hat{I}, \tau$. The required properties of functions $\mathcal{H}_i, H_r$ follow.

Corollary 1.1 *The value of variable $\hat{I}$ is preserved along a solution with an accuracy $O(\varepsilon^r)$ on time interval $O(\varepsilon^{-k})$ for any prefixed natural number k. The value of variable $\hat{\phi}$ is defined by an integrable Hamiltonian system with Hamiltonian $\mathcal{H}_{\Sigma,r}$ with an accuracy $O(\varepsilon^{r-k})$ on the same time interval.*

Proof.

Consider the change of variables $(I, \phi) \mapsto (\tilde{I}, \tilde{\phi})$ generated by function $\tilde{W} = \tilde{I}\phi + \varepsilon\tilde{S}(\tilde{I}, \phi, \tau, \varepsilon)$, $\tilde{S} = S_1 + \varepsilon S_2 + \ldots + \varepsilon^{r+k-2} S_{r-1}$.

According to Theorem 1, the Hamiltonian function in the new variables has the form:

$$\tilde{\mathcal{H}} = \mathcal{H}_{\Sigma,r+k}(\tilde{I}, \tau, \varepsilon) + \varepsilon^{r+k} H_{r+k}(\tilde{I}, \phi, \tau, \varepsilon). \tag{1.10}$$

The expressions for the change of variables give $\hat{I} - \tilde{I} = O(\varepsilon^r)$. Hence, below we consider variation of variables $\tilde{I}$ and $\hat{\phi}$. Variation of value $\tilde{I}$ between the impacts with the walls is $O(\varepsilon^r)$. Consider variation of value $\tilde{I}$ at an impact with the moving wall. Lemma 1 describes the way to calculate the value of variable I after an impact with the wall. In order to determine variation of variable $\tilde{I}$ one substitutes $I = I(\tilde{I}, \phi, \tau, \varepsilon)$ in Hamiltonian H in (1.3) and notes that $H = \mathcal{H} - \varepsilon^2 \frac{\partial \tilde{S}}{\partial \tau}$. Thus, one obtains the following expression

$$\mathcal{H}_{\Sigma,r+k}(\tilde{I}_+, \tau, \varepsilon) + \varepsilon^{r+k} H_{r+k}(\tilde{I}_+, \pi + 0, \tau, \varepsilon) - \varepsilon^2 \frac{\partial \tilde{S}(\tilde{I}_+, \pi, \tau, \varepsilon)}{\partial \tau} = \mathcal{H}_{\Sigma,r+k}(\tilde{I}_-, \tau, \varepsilon) +$$

$$+\varepsilon^{r+k} H_{r+k}(\tilde{I}_-, \pi - 0, \tau, \varepsilon) - \varepsilon^2 \frac{\partial \tilde{S}(\tilde{I}_-, \pi, \tau, \varepsilon)}{\partial \tau}.$$

Here $\tilde{I}_-$ and $\tilde{I}_+$ are the values of $\tilde{I}$ prior to and after the impact respectively. We note that the function $\tilde{S}$ is continuous with respect to ϕ. Hence, we find

$$\left(\frac{\partial E(\tilde{I}_-, \tau)}{\partial \tilde{I}} + O(\varepsilon^2) \right) (\tilde{I}_+ - \tilde{I}_-) = O(\varepsilon^{r+k}).$$

Therefore $\tilde{I}_+ - \tilde{I}_- = O(\varepsilon^{r+k})$.

The particle collides with the walls not more than $O(\varepsilon^k)$ times. Therefore the value of $\tilde{I}$ varies as $O(\varepsilon^r)$. Hence the part of the statement concerning variable $\tilde{I}$ is proved.

Consider now variation of $\hat{\phi}$. On any time interval between the impacts with the moving wall value of $\hat{\phi}$ deviates from the solution of equation $\dot{\hat{\phi}} = \frac{\partial \mathcal{H}_{\Sigma,r}}{\partial \hat{I}}$, $\hat{I} = \text{const}$ by $O(\varepsilon^r)$. At a collision with the moving wall value of variable $\hat{\phi}$ jumps. Value of the jump can be found from the formulas for change of variables (1.8) and depends on variation of $\hat{I}$. Functions S_m are continuous with respect to ϕ. Hence, the jump in the phase at an impact with the wall is $O(\varepsilon^{r+1})$. This completes the proof of the statement.

Corollary 1.2 *Value of variable I is preserved with an accuracy $O(\varepsilon)$ on a time interval $O(\varepsilon^{-k})$ for any prefixed natural number k.*

Corollary 1.3 *The formulas for change of variables $\hat{I}, \hat{\phi} \mapsto I, \phi$ and approximate expressions $\hat{I} = const$, $\dot{\hat{\phi}} = \frac{\partial \mathcal{H}_{\Sigma,r}}{\partial \hat{I}}$ describe the behaviour of variables I, ϕ with an accuracy $O(\varepsilon^r)$ for I and $O(\varepsilon^{r-k})$ for ϕ on the time interval $O(\varepsilon^{-k})$.*

Remark 1 *Lemma 1, theorem 1 and corollaries 1.1 - 1.3 can be used in case of motion in potential $U(x, \tau) \in C^\infty$ between the walls, and the particle in adiabatic approximation collides with the walls at a nonzero velocity.*

Remark 2 *In [10] systems with impacts are investigated in the following way. Instead of system with impacts, a smooth system with a repulsive potential strong in a thin layer (the thickness of the layer $\delta << 1$, the gradient of the potential $\sim 1/\delta$) is considered. Properties of the system with impacts are derived from that of the smooth system proceeding to limit as $\delta \to 0$. Following this approach one could define such a potential for Fermi-Ulam problem (and for problems considered below, sec. 2,3), use the perturbation theory for the smooth system and obtain corresponding accuracy estimates for the system with impacts. However, one should consider uniformity of accuracy estimates in δ. The method defined above allows to avoid this problem.*

2 A slowly irregular planar waveguide

In this section we consider slowly irregular planar waveguides. The problem is to find the trace for a ray of light propagating in a slowly irregular waveguide with reflective walls. A slow irregularity means that the width of the waveguide is changing slowly along the waveguide's length [11].

Assume, for simplicity, that one wall of the waveguide coincides with x axis. The position of another wall in the plane Oxy is defined by formula $y = d(X)$, where $X = \varepsilon x$, ε is a small parameter (Fig.3). Let $d(\cdot) \in C^\infty$. Let us consider the problem on a time interval $O(\varepsilon^{-k})$, where k is any prefixed natural number. Assume that function d, its derivatives of any order and function $1/d$ are uniformly bounded on the real axis.

One can describe the propagation of rays of light in a medium using the Hamiltonian system with Hamiltonian

$$H = p_x^2 + p_y^2 - n^2(x, y), \tag{2.1}$$

where one should consider only zero energy level $H = 0$ [11]. Here $p_{x,y}$ are the variables canonically conjugated to the coordinates x, y and $n(x, y)$ is the refraction index. In our case inside the waveguide $n = 1$. The Hamiltonian system is not well defined at the reflective walls and one can use only conservation laws there. In the unperturbed system $X = \text{const}$ and the projection of a phase trajectory on p_y, y plane looks similar to the phase trajectory of a particle in Fig.2. Like in the previous section, one can make a canonical change of variables $(p_y,\, y)$ to "action-angle" variables $(I,\, \phi)$: $I = \frac{|p_y| \cdot d(X)}{\pi}$; if phase ϕ is zero at the bottom wall, then

$$\phi = \begin{cases} \pi \frac{y}{d(X)}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{y}{d(X)}), & \phi \in (\pi,\, 2\pi). \end{cases} \tag{2.2}$$

Using standard definition of the phase (2.2) one obtains the generating function for the change of variables $(p_y,\, y)$ to the "action-angle" variables in the following form

$$W(I, y, X) = \begin{cases} \pi \frac{Iy}{d}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{Iy}{d}), & \phi \in (\pi,\, 2\pi). \end{cases} \tag{2.3}$$

Make a canonical change of variables $(\, p_x\,,\ x\,,\ p_y\,,\ y\,) \mapsto (\, \hat{p}_x\,,\ x\,,\ I\,,\ \phi\,)$ with generating function $S = \hat{p}_x x + W(I, y, \varepsilon x)$ in the exact (perturbed) system. The Hamiltonian in the new variables is

$$H = \frac{\pi^2 I^2}{d^2} + \left(\hat{p}_x - \varepsilon \frac{I\, d'}{d} f(\phi) \right)^2 - 1, \tag{2.4}$$

where $f(\phi)$ is defined in (1.4), the prime denotes a derivative with respect to X.

At a reflection at the bottom wall value of the "action" is preserved. At a reflection at the upper wall it transforms according to the following expression

$$I_1 = I - \frac{2\varepsilon d'}{1+\varepsilon^2 d'^2}(\varepsilon d' I + \frac{dp_x}{\pi}). \tag{2.5}$$

Remark 3 *Value $\hat{p}_x$ is preserved at a reflection. Formula (2.5) defines the law of transformation for the angle of the ray of light arriving to the bottom wall. This angle transforms after an impact with the upper wall as $\alpha_1 = \alpha - 2\,arctg(\varepsilon d')$, thus implying (2.5).*

Lemma 2 *Consider Hamiltonian (2.4) and fix variables $(\hat{p}_x,\, x)$. Value of the Hamiltonian is preserved when value of ϕ passes through π. This law of conservation defines the actual value of "action" variable I after reflection at the upper wall of the waveguide.*

Proof.

Set equal values of Hamiltonian (2.4) before and after reflection of the ray at the upper wall:

$$\frac{\pi^2 I^2}{d^2} + \left(\hat{p}_x - \varepsilon\frac{I\,d'}{d}\pi\right)^2 - 1 = \frac{\pi^2 {I_1}^2}{d^2} + \left(\hat{p}_x + \varepsilon\frac{I_1\,d'}{d}\pi\right)^2 - 1.$$

After transformations obtain

$$\frac{\pi^2 I^2}{d^2}(1+\varepsilon^2 d'^2) - 2\varepsilon\hat{p}_x\frac{I\,d'}{d}\pi = \frac{\pi^2 {I_1}^2}{d^2}(1+\varepsilon^2 d'^2) + 2\varepsilon\hat{p}_x\frac{I_1\,d'}{d}\pi.$$

As value of the "action" variable is positive, we find

$$I_1 = I - \frac{2\varepsilon d'}{1+\varepsilon^2 d'^2}\frac{\hat{p}_x d}{\pi}.$$

Substituting the expression for momentum $p_x = \hat{p}_x - \varepsilon\frac{I\,d'}{d}\pi$, we finally get formula

$$I_1 = I - \frac{2\varepsilon d'}{1+\varepsilon^2 d'^2}(\varepsilon d' I + \frac{dp_x}{\pi}),$$

coinciding with (2.5). The lemma is proved.

Let us formulate the basic statement of the adiabatic perturbation theory for the considered problem.

Theorem 2 *After canonical change of variables $(\hat{p}_x, x, I, \phi) \;\mapsto\; (\tilde{p}_x, \tilde{x}, \tilde{I}, \tilde{\phi})$ with generating function*

$$W = \tilde{I}\phi + \tilde{p}_x x + \varepsilon S(\tilde{I}, \phi, \tilde{p}_x, \varepsilon x, \varepsilon), \qquad S = S_1 + \varepsilon S_2 + \ldots + \varepsilon^{r-2} S_{r-2}, \tag{2.6}$$

where r is any prefixed natural number, Hamiltonian (2.4) takes the following form

$$H = \mathcal{H}_{\Sigma,r}(\tilde{I}, \tilde{p}_x, \varepsilon\tilde{x}, \varepsilon) + \varepsilon^r H_r(\tilde{I}, \phi, \tilde{p}_x, \varepsilon x, \varepsilon), \tag{2.7}$$

$$\mathcal{H}_{\Sigma,r} = \frac{\pi^2 \tilde{I}^2}{d^2} + \tilde{p}_x^2 - 1 + \varepsilon\mathcal{H}_1 + \ldots + \varepsilon^{r-1}\mathcal{H}_{r-1}.$$

Here functions S_i, $\mathcal{H}_i$ are C^∞ with respect to $\tilde{I}, \tilde{p}_x, \varepsilon\tilde{x}$; S_i are continuous functions of ϕ.

Proof.

Make a canonical change of variables $(I, \phi, \hat{p}_x, x) \mapsto (\tilde{I}, \tilde{\phi}, \tilde{p}_x, \tilde{x})$ with generating functions (2.6). The variables are transformed as:

$$\begin{cases} I = \tilde{I} + \varepsilon\frac{\partial S}{\partial \phi}, \\ \tilde{\phi} = \phi + \varepsilon\frac{\partial S}{\partial I}, \\ \hat{p}_x = \tilde{p}_x + \varepsilon^2\frac{\partial S}{\partial \varepsilon x}, \\ \varepsilon\tilde{x} = \varepsilon x + \varepsilon^2\frac{\partial S}{\partial \tilde{p}_x}. \end{cases} \tag{2.8}$$

Following the standard procedure of the adiabatic perturbation theory, define functions S_m such that the Hamiltonian in the new variables does not depend on ϕ up to terms of order $O(\varepsilon^m)$ and S_m are continuous and periodic with respect to ϕ. The procedure is as follows: substitute formulas for the change of the "action" and longitudinal variables $(\hat{p}_x, x)$ from (2.8) to Hamiltonian (2.4) and choose the generating function so that the Hamiltonian in the new variables has form (2.7).

Thus, one can recurrently define functions S_m. For example, an equation for S_1 looks as follows:

$$\frac{\partial S_1}{\partial \phi} = \frac{\tilde{p}_x d(X) d'}{\pi^2} f(\phi).$$

One can choose functions S_m in such a way that they have zero average with respect to ϕ. Finally, the Hamiltonian takes the form we need. Functions S_i, H_i obviously have all the properties mentioned in the theorem.

Consider the solutions of Hamiltonian equations with Hamiltonians (2.9) and $\mathcal{H}_{\Sigma,r}(J, p, \varepsilon x, \varepsilon)$ corresponding to initial conditions $\tilde{I}(0) = J(0)$, $\tilde{\phi}(0) = \psi(0)$, $\tilde{p}_x(0) = p(0)$, $\tilde{x}(0) = x(0)$, where ψ is the phase variable conjugated to variable J.

Corollary 2.1 *Value of variable* $\tilde{I}$ *is preserved with an accuracy* $O(\varepsilon^r)$ *on a time interval* ε^{-k} *for any prefixed natural number* k. *The projection of the ray's trajectory on* $\tilde{p}_x, \varepsilon\tilde{x}$ *plane on such an interval lies in the* $O(\varepsilon^r)$*-neighbourhood of curve* $\mathcal{H}_{\Sigma,r}(J, p, \varepsilon x, \varepsilon) = 0$. *Behaviour of variables* $\varepsilon\tilde{x}, \tilde{p}_x, \tilde{\phi}$ *is described by the solution of the system with Hamiltonian* $\mathcal{H}_{\Sigma,r}$ *with accuracies* $O(\varepsilon^{r-k+1}), O(\varepsilon^{r-k+1})$, *and* $O(\varepsilon^{r-k})$ *respectively (under some natural additional conditions given below).*

Proof.

Similarly to the previous section, consider an auxiliary change of variables with generating function

$$W = \bar{I}\phi + \bar{p}_x x + \varepsilon S_1(\bar{I}, \phi, \bar{p}_x, \varepsilon x) + \ldots + \varepsilon^{r+k-1} S_{r+k-1}(\bar{I}, \phi, \bar{p}_x, \varepsilon x).$$

According to Theorem 2, Hamiltonian (2.4) takes the form:

$$H = \mathcal{H}_{\Sigma,r+k}(\bar{I}, \bar{p}_x, \varepsilon\bar{x}, \varepsilon) + \varepsilon^{r+k} H_{r+k}(\bar{I}, \phi, \bar{p}_x, \varepsilon x, \varepsilon),$$

where ϕ and x are considered as functions of new variables $(\bar{I}, \bar{\phi}, \bar{p}_x, \bar{x})$. Formulas for the change of variables give $\tilde{I} - \bar{I} = O(\varepsilon^r)$, $\tilde{\phi} - \bar{\phi} = O(\varepsilon^r)$, $\tilde{x} - \bar{x} = O(\varepsilon^r)$ and $\tilde{p}_x - \bar{p}_x = O(\varepsilon^{r+1})$. Therefore, it is sufficient to consider behaviour of variables $\bar{I}, \tilde{\phi}, \tilde{p}_x, \tilde{x}$.

Consider an approximate conservation of variable $\bar{I}$. The ray's Hamiltonian in the new variables is

$$H = \mathcal{H}_{\Sigma,r+k}(\bar{I}, \bar{p}_x, \varepsilon\bar{x}, \varepsilon) + \varepsilon^{r+k} H_{r+k}(\bar{I}, \phi, \bar{p}_x, \varepsilon x, \varepsilon). \tag{2.9}$$

On each time interval between the reflections of the ray at the upper wall variable $\bar{I}$ vary according to Hamiltonian equation

$$\dot{\bar{I}} = -\varepsilon^{r+k} \frac{\partial H_{r+k}}{\partial \bar{\phi}}.$$

After summing up over all such intervals, it gives an accuracy of conservation $O(\varepsilon^r)$.

It follows from (2.9) that values of variables $(\bar{p}_x, \bar{x})$ jump at a reflection of the ray at the upper wall. However, the generating function for the change of variables is continuous with respect to ϕ. Therefore, formulas for the change of variables give $\Delta\bar{p}_x = O(\varepsilon^2 \Delta\bar{I})$, $\Delta\varepsilon\bar{x} = O(\varepsilon^2 \Delta\bar{I})$, where $\Delta\bar{I}$, $\Delta\bar{p}_x$, $\Delta\varepsilon\bar{x}$ are jumps of variables $\bar{I}$, $\bar{p}_x$, $\varepsilon\bar{x}$ after reflection of the ray at the upper wall. Using Lemma 2, one estimates value of the jump of variable $\bar{I}$ as $O(\varepsilon^{r+k})$. The ray reflects at the upper wall not more than $O(\varepsilon^{-k})$ times on the time interval ε^{-k}. Therefore, total variation of variable $\bar{I}$ is $O(\varepsilon^r)$. Thus, the part of the theorem concerning variable $\bar{I}$ is proved.

Projection of the rays trajectory on $\tilde{p}_x, \varepsilon\tilde{x}$ plane is in $O(\varepsilon^r)$-neighbourhood of the curve $\mathcal{H}_{\Sigma,r}(J, p, \varepsilon x, \varepsilon) = 0$ because along the trajectory $\mathcal{H}_{\Sigma,r}(J, \tilde{p}_x, \varepsilon\tilde{x}, \varepsilon) = O(\varepsilon^r)$.

Values of variables p, x, ψ change continuously, yet values of variables $\bar{p}_x, \bar{x}, \bar{\phi}$ jump at a reflection of the ray at the upper wall. It was noted above that values of jumps of variables $\bar{p}_x, \bar{x}, \bar{\phi}$ are determined by the value of jump of $\bar{I}$ at the reflection of the ray at the upper wall as $\Delta\bar{p} = O(\varepsilon^2\Delta\bar{I}) = O(\varepsilon^{r+k+2})$ $\Delta\bar{x} = O(\varepsilon\Delta\bar{I}) = O(\varepsilon^{r+k+1})$ and $\Delta\bar{\phi} = O(\varepsilon\Delta\bar{I}) = O(\varepsilon^{r+k+1})$. Thus, total variations of values of variables $(\bar{p}_x, \bar{x}, \bar{\phi})$ due to reflections are $O(\varepsilon^{r+2})$ for variable $\bar{p}_x$ and $O(\varepsilon^{r+1})$ for variables $\bar{x}$ и $\bar{\phi}$. Total variations of variables $\tilde{p}_x, \tilde{x}, \tilde{\phi}$ due to reflections are the same.

Consider the zero approximation of Hamiltonian $\mathcal{H}_{\Sigma,r}$:

$$\mathcal{H}^0_{\Sigma,r} \stackrel{def}{=} F = \frac{\pi^2 I^2}{d^2(\varepsilon x)} + p^2$$

The Hamiltonian system with Hamiltonian $\frac{1}{2}\mathcal{H}^0_{\Sigma,r}$ describes the motion of a particle in potential $U = \frac{\pi^2 I^2}{2d^2(\varepsilon x)}$. Assume (see Fig.4) that for the ray under consideration value of function F satisfies one of the following conditions: 1) it is larger than value of any local maximum of $2U$ or 2) the ray can reflect at a potential hump only once or 3) the ray moves between two potential humps (resonator).

Consider case 1). The motion of the ray has a given direction, variables $\tilde{x}$ and x vary monotonically. One can consider variables $\tilde{p}_x$ and p as functions of variables $\varepsilon\tilde{x}$ and εx respectively. At $x = \tilde{x}$ values of variables $\tilde{p}_x$ and p differ by $O(\varepsilon^r)$. It takes different time for variables $\tilde{x}$ and x to reach a given value x_*. This difference can be estimated as follows:

$$\int\limits_{x(0)}^{x_*} \left(\frac{1}{\dot{\tilde{x}}} - \frac{1}{\dot{x}}\right) dx = O(\varepsilon^{r-k}).$$

Hence, for a given moment of time t one obtains: $\varepsilon\tilde{x}(t) - \varepsilon x(t) = O(\varepsilon^{r-k+1})$, $\tilde{p}_x(t) - p(t) = O(\varepsilon^{r-k+1})$.

The deviation of phases $\tilde{\phi} - \psi$ at $x = \tilde{x} = x_*$ is :

$$\tilde{\phi} - \psi = \int\limits_{x(0)}^{x_*} \left(\frac{\omega(\tilde{I}, \tilde{p}_x, \varepsilon x, \varepsilon)}{\dot{\tilde{x}}} - \frac{\omega(J, p, \varepsilon x, \varepsilon)}{\dot{x}}\right) dx + O(\varepsilon^{r-k}) = O(\varepsilon^{r-k}), \qquad (2.10)$$

where we introduced $\omega = \frac{\partial\mathcal{H}_{\Sigma,r}}{\partial I}$. Therefore, for a given moment of time t one gets: $\tilde{\phi}(t) - \psi(t) = O(\varepsilon^{r-k})$.

In case 2) the ray can change its direction of propagation only once. Here one can consider two different regions and use either variable x or p as monotonically changing variable in the corresponding region. In case 3) the waveguide is configured as a resonator. One

can introduce an "angle" variable in the phase portrait of the system with Hamiltonian $\mathcal{H}_{\Sigma,r}(I,p,x)$ as a monotonically changing variable. All arguments here are the same as in case 1).

Corollary 2.2 *Value of variable I is preserved with an accuracy $O(\varepsilon)$ on a time interval ε^{-r} for any prefixed natural number r.*

Corollary 2.3 *Behaviour of variables $I,\phi,\hat{p}_x,x$ can be found from the change of variables $\tilde{I},\tilde{\phi},\tilde{p}_x,\tilde{x} \mapsto I,\phi,\hat{p}_x,x$ together with approximate expressions defining motion in the system with Hamiltonian $\mathcal{H}_{\Sigma,r}(\tilde{I},\tilde{p}_x,\varepsilon\tilde{x})$. An accuracy of such a description is the same as the accuracy for variables $\tilde{I},\tilde{\phi},\tilde{p}_x,\tilde{x}$ according to corollary 2.1.*

Remark 4 *The Hamiltonian system with Hamiltonian*

$$H = \frac{\pi^2 I^2}{d^2} + \hat{p}_x^2 - 1 \tag{2.11}$$

considered on the energy level $H=0$ describes the ray's trajectory with an accuracy $O(\varepsilon)$ on time intervals of order ε^{-1}.

Remark 5 *Suppose that there is nonhomogeneous medium between the walls such that a refraction index $n(\varepsilon x,y) \in C^\infty$ and trace of the ray in adiabatic approximation is inclined to the walls at reflection at a nonzero angle; then Lemma 2, Theorem 2 and its corollaries 2.1 – 2.3 are still valid.*

3 Dynamics of a massive piston in a gas of light particles

The problem of an adiabatic piston is an important model in statistical mechanics. It is considered in the context of attempts to derive thermodynamics laws from the laws of mechanics (see, for example, [2],[12]). The corresponding system consists of a container with a massive cylindrical piston and a gas of identical light particles that move independently elastically colliding with the walls of the container and with the piston.

Let the mass of a particle be equal to 1. Length of the container subtracting thickness of the piston L and the number of gas particles are of the order 1. Mass of the piston M is large in comparison with mass of the gas. Suppose the piston is at rest at the initial moment of time; then energy of the system does not depend on mass of the piston. Hence, one can estimate energy of the piston as $O(1)$ and its typical velocity as $O(\frac{1}{\sqrt{M}})$. Therefore, it is useful to introduce a small parameter $\varepsilon = \frac{1}{\sqrt{M}}$. Let us discuss the problem on a time interval of order ε^{-1}.

Below, to shorten the calculations, we consider the case when there is only one particle on each side of the piston (Fig.5). One can easily generalize following arguments for the case of any prefixed number of particles. At the end of the section we give the result for the general case. Without loss of generality, assume that the particles' velocities are parallel to the axis of the container; thus, the motion is one-dimentional. Let indexes l, r correspond to variables of left and right particles respectively. The variables without indexes correspond to the piston. Thus, full energy of the system is of the form:

$$E = \varepsilon^2 \frac{P^2}{2} + \frac{p_l^2}{2} + \frac{p_r^2}{2}, \tag{3.1}$$

where $p_{l,r}$ are momenta of particles, P is momentum of the piston. Denote as $x_{l,r}$ distances between particles and the left wall of the container, as X distance between the piston and the left wall of the container. The distance for the right particle is calculated subtracting the thickness of the piston.

Suppose the piston is fixed. For each particle make a canonical change of variables from (p, x) to "action-angle" variables (I, ϕ) the same way as in Fermi-Ulam problem (Sec. 1). Let phases $\phi_{l,r}$ be zero at the walls of the container; then

$$\phi_l = \begin{cases} \pi\frac{x_l}{X}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{x_l}{X}), & \phi \in (\pi,\, 2\pi), \end{cases} \qquad \phi_r = \begin{cases} \pi\frac{L-x_r}{L-X}, & \phi \in (0,\, \pi), \\ \pi(2 - \frac{L-x_r}{L-X}), & \phi \in (\pi,\, 2\pi). \end{cases} \tag{3.2}$$

Conjugated "action" variables are $I_l = \frac{|p_l|X}{\pi}$, $I_r = \frac{|p_r|(L-X)}{\pi}$. If phases are defined by (3.2), generating functions for the change of variables (p, x) to "action-angle" have the following forms:

$$S_l(I_l, x_l, X) = \begin{cases} \pi\frac{I_l x_l}{X}, & \phi_l \in (0,\, \pi), \\ \pi I_l(2 - \frac{x_l}{X}), & \phi_l \in (\pi,\, 2\pi), \end{cases}$$

$$S_r(I_r, x_r, X) = \begin{cases} \pi\frac{I_r(L-x_r)}{L-X}, & \phi_r \in (0,\, \pi), \\ \pi I_r(2 - \frac{L-x_r}{L-X}), & \phi_r \in (\pi,\, 2\pi). \end{cases}$$

Make the change of variables with generating function $W = \hat{P}X + S_l(I_l, x_l, X) + S_r(I_r, x_r, X)$ in the exact system, when the piston is moving. The Hamiltonian in the new variables has the form:

$$\mathcal{H} = \varepsilon^2 \frac{1}{2}\left(\hat{P} - \frac{I_l}{X} f(\phi_l) + \frac{I_r}{L-X} f(\phi_r)\right)^2 + \frac{\pi^2 I_l^2}{2X^2} + \frac{\pi^2 I_r^2}{2(L-X)^2}, \tag{3.3}$$

where function $f(\phi)$ defined by (1.4).

Let us find jump of the "action" variable at an impact. It is natural to fix values of all variables except the variables of the colliding particle, obtain the Hamiltonian for the particle and consider the conservation law for the value of the Hamiltonian. Let us formulate the corresponding lemma for the left particle (the lemma for the right particle is formulated analogously). Let the prime denote value of the variable after an impact.

Lemma 3 *This approach defines actual value of the "action" variable after an impact:*

$$I_l' = I_l - \frac{2PX}{\pi M} + \frac{2}{M+1}(\frac{PX}{\pi M} - I_l). \tag{3.4}$$

Remark 6 *Velocities v and V of the particles of mass 1 and M transform after an elastic collision as follows:*

$$\begin{cases} V' = V + \frac{2}{M+1}(v - V), \\ v' = 2V - v + \frac{2}{M+1}(v - V). \end{cases}$$

"Action" of the particle and momentum of the piston are $I_l = \frac{|v|X}{\pi}$, $P = MV$, from which follows (3.4).

Remark 7 *If two particles collide with the piston at the same moment, the further dynamics is not defined. Measure of initial conditions corresponding to such collisions equals 0. Therefore, we do not consider these initial condition.*

Proof.

An impact is the the passage of ϕ_l through the value π. Equating values of the energy prior to- and after an impact, we find

$$\frac{\pi^2 I_l^2}{2X^2}\frac{M+1}{M} - \frac{\pi I_l}{MX}(\hat{P} + \frac{I_r f(\phi_r)}{L-X}) = \frac{\pi^2 I_l'^2}{2X^2}\frac{M+1}{M} + \frac{\pi I_l'}{MX}(\hat{P} + \frac{I_r f(\phi_r)}{L-X}). \tag{3.5}$$

After calculations one obtains value of the "action" variable:

$$I_l' = I_l - \frac{2}{M+1}\frac{X}{\pi}(\hat{P} + \frac{I_r f(\phi_r)}{L-X}). \tag{3.6}$$

Let P denote value of momentum of the piston prior to an impact; then

$$I_l' = I_l - \frac{2}{M+1}\frac{X}{\pi}(P + \frac{\pi I_l}{X}). \tag{3.7}$$

Finally

$$I_l' = I_l - \frac{2PX}{\pi M} + \frac{2}{M+1}(\frac{PX}{\pi M} - I_l),$$

and the lemma is proved.

Theorem 3 *Values of variables* $I_{l,r}$ *are preserved with an accuracy* $O(\varepsilon)$ *on a time interval* ε^{-1}.

Proof.

Introduce the normalized momentum of the piston by expression $\check{P} = \varepsilon\hat{P}$ and consider Hamiltonian (3.3) with an accuracy $O(\varepsilon^2)$:

$$\mathcal{H} = \frac{\check{P}^2}{2} + \frac{\pi^2 I_l^2}{2X^2} + \frac{\pi^2 I_r^2}{2(L-X)^2} - \varepsilon\check{P}\frac{I_l}{X}f(\phi_l) + \varepsilon\check{P}\frac{I_r}{L-X}f(\phi_r) + O(\varepsilon^2). \tag{3.8}$$

Make a canonical change of variables $(\, I_{l,r}\,,\ \phi_{l,r}\,,\ \varepsilon^{-1}\check{P}\,,\ X\,) \mapsto (\, \tilde{I}_{l,r}\,,\ \tilde{\phi}_{l,r}\,,\ \varepsilon^{-1}\tilde{P}\,,\ \tilde{X}\,)$, eliminating dependence of the Hamiltonian on the phase with an accuracy ε^2. The generating function for this change of variables has the form:

$$W = \frac{1}{\varepsilon}\tilde{P}X + \tilde{I}_l\phi_l + \tilde{I}_r\phi_r + \varepsilon S_l(\tilde{I}_l, \phi_l, \tilde{P}, X) + \varepsilon S_r(\tilde{I}_r, \phi_r, \tilde{P}, X). \tag{3.9}$$

Consider the expressions connecting old and new variables:

$$\begin{cases} I_{l,r} = \tilde{I}_{l,r} + \varepsilon\frac{\partial S_{l,r}}{\partial\phi_{l,r}}, \\ \tilde{\phi}_{l,r} = \phi_{l,r} + \varepsilon\frac{\partial S_{l,r}}{\partial I_{l,r}}, \\ P = \tilde{P} + \varepsilon^2\frac{\partial S_l}{\partial X} + \varepsilon^2\frac{\partial S_r}{\partial X}, \\ \tilde{X} = X + \varepsilon^2\frac{\partial S_l}{\partial\tilde{P}} + \varepsilon^2\frac{\partial S_r}{\partial\tilde{P}}. \end{cases} \tag{3.10}$$

Substitute these expressions in Hamiltonian (3.8) and choose functions $S_{l,r}$ so that the Hamiltonian in the new variables does not depend on the phases in the first order in ε.

Therefore, functions $S_{l,r}$ satisfy equations

$$\frac{\partial S_l}{\partial\phi_l} = \frac{\tilde{P}Xf(\phi_l)}{\pi^2}, \qquad \frac{\partial S_r}{\partial\phi_r} = -\frac{\tilde{P}(L-X)f(\phi_r)}{\pi^2}. \tag{3.11}$$

It follows from (3.11) that functions $S_{l,r}$ are defined up to an arbitrary function of variables $\tilde{I}_{l,r}, \tilde{P}, X$. Let this function be equal to 0 and call variables $\tilde{I}_{l,r}$ the "improved

actions". It is easy to see from (3.10), (3.11), that the new phase coincides with the old one ($\tilde{\phi}_{l,r} = \phi_{l,r}$), and the Hamiltonian has a discontinuity at $\tilde{\phi}_{l,r} = \pi$.

Lemma 3 and formulas (3.10), (3.11) allow to find variation of the "improved action" after an impact as $O(\varepsilon^2)$. Variation of the "improved actions" between collisions is also $O(\varepsilon^2)$. One can estimate the number of collisions on a time interval ε^{-1} as $O(\varepsilon^{-1})$. Hence, on a time interval ε^{-1} "improved actions" vary by $O(\varepsilon)$. The "action" variables are related to "improved actions" by formulas for the change of variables $I_{l,r} = \tilde{I}_{l,r} + \varepsilon \frac{\partial S_{l,r}}{\partial \phi_{l,r}}$. Therefore, "action" variables vary by $O(\varepsilon)$ on the same time interval and the theorem is proved.

Corollary 3.1 *Let*

$$H = \varepsilon^2 \frac{P^2}{2} + \frac{\pi^2 I_l^2}{2X^2} + \frac{\pi^2 I_r^2}{2(L-X)^2}, \qquad I_{l,r} = const, \tag{3.12}$$

where $I_{l,r}$ are initial values of the "action" variables. The Hamiltonian system with Hamiltonian (3.12) describe the behaviour of variables $\varepsilon P, X$ with an accuracy $O(\varepsilon)$ on a time interval ε^{-1} .

One can similarly consider the system with any prefixed number of particles. Value of the "action" variable of each particle is preserved with an accuracy $O(\varepsilon)$ on a time interval ε^{-1} . The Hamiltonian system with Hamiltonian

$$H = \varepsilon^2 \frac{P^2}{2M} + \frac{\pi^2}{2X^2} I_{\Sigma,l}^2 + \frac{\pi^2}{2(L-X)^2} I_{\Sigma,r}^2, \tag{3.13}$$

describes behaviour of variables $\varepsilon P, X$ with an accuracy $O(\varepsilon)$ on the same time interval. Here $I_{\Sigma,r}^2$ and $I_{\Sigma,l}^2$ are the sums of squared initial values of "action" variables for the left particles and for the right particles respectively. (This result was first derived in [2] by a different method.)

Remark 8 *In the considered approximation the piston oscillates in potential $U = \frac{\pi^2}{2\tilde{X}^2} I_{\Sigma,l}^2 + \frac{\pi^2}{2(L-\tilde{X})^2} I_{\Sigma,r}^2$ (Fig.6).*

4 Acknowledgements

The work was partially supported by RFBR (03-01-00158, НШ136.2003.1)

Список литературы

[1] V.I. Arnold, V.V. Kozlov, A.I. Neishtadt, Mathematical aspects of classical and celestial mechanics, Encyclopaedia of Mathematical Sciences, Vol. 3, Springer, Berlin, (1988).

[2] Ya.G. Sinai, Dynamics of a massive piston surrounded by a finite number of light particles, Theor. Math. Phys., 125, 1351-1357 (1999).

[3] V.I. Arnold. Mathematical Methods of Classical Mechanics, Springer, New York, (1978).

[4] A.I. Neishtadt, Propagation of beams through smoothly irregular waveguides and theory of perturbations in Hamiltonian systems. Radiophys. and Quantum Electronics, 25, no. 2, 157–164 (1982)

[5] A.P. Markeev, On the motion of a solid with an ideal nonretaining constraint, J. Appl. Math. Mech., 49 (1985), no. 5, 545–552 (1986)

[6] A.P. Markeev, Qualitative analysis of systems with an ideal nonretaining constraint, J. Appl. Math. Mech., 53 (1989), no. 6, 685–689 (1991)

[7] V. Zharnitsky, Invariant tori in Hamiltonian systems with impacts, Commun. Math. Phys., 211, no. 2, 289 – 302 (2000).

[8] A.I. Neishtadt, The separation of motions in systems with rapidly rotating phase, J. Appl. Math. Mech., 48, 133-139 (1984).

[9] R.Z. Sagdeev, D.A. Usikov, G.M. Zaslavsky. Nonlinear Physics, Harwood Academic Publishers, Chur, (1988).

[10] V.V. Kozlov, D.V. Treshchev, A Genetic Introduction to the Dynamics of Systems with Impacts, AMS. 171 pp. (1991).

[11] Yu.A. Kravtsov, Yu.A. Orlov, Geometrical Optics of Inhomogeneous Media, Springer Verlag, New York, (1990).

[12] E. Lieb, Some problems in statistical mechanics that I would like to see solved, Phys. A, 263, no. 1–4, 491 – 499 (1999).

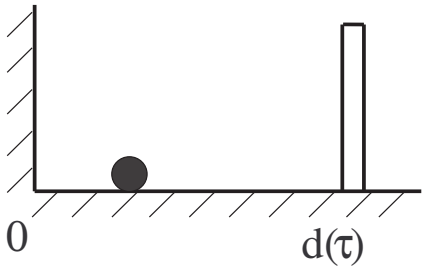

Рис. 1: A ball between slowly moving walls.

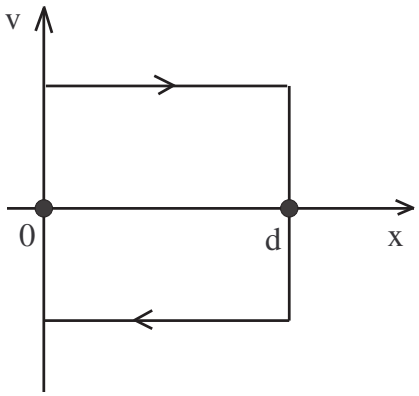

Рис. 2: A phase portrait for the motion of the particle.

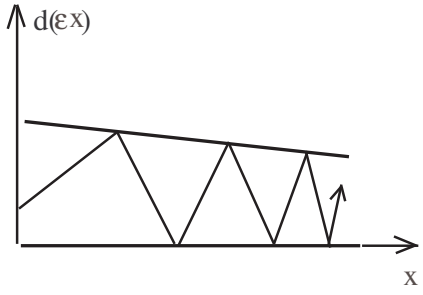

Рис. 3: A planar slowly irregular waveguide.

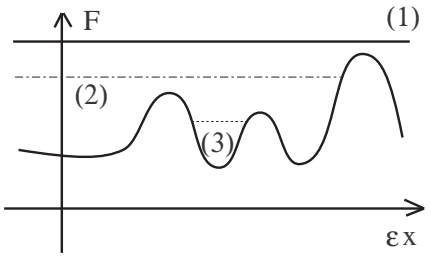

Рис. 4: The plot of function $2U$ and levels of function F.

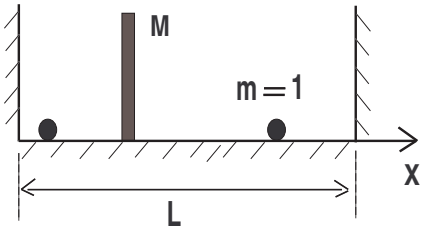

Рис. 5: The system of a piston and two particles.

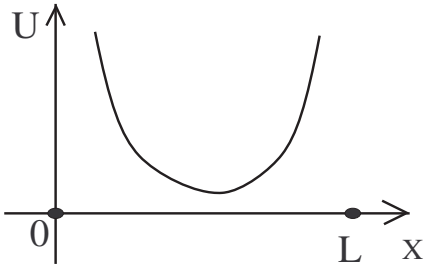

Рис. 6: The effective potential energy of the piston.